
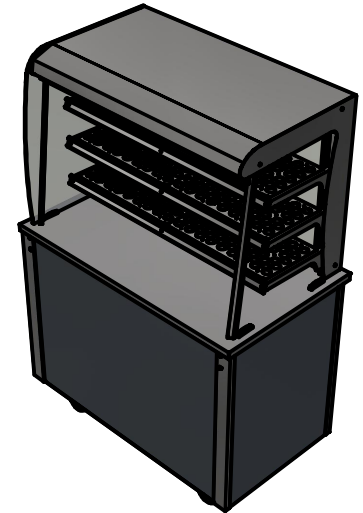


Warning

Do not install unit in draughts where the air movement is greater than 0.2mtr/sec.
e.g.near entrance/exit doors, open windows, under air conditioning units or a ceiling mounted fan
Ambient room conditions must not drop below 16°C.

NOTE:- Serving height for children up to 12 years of age.
This model is available with a work top height of 800mm
Trayslide height of 773mm.
Please add "B" to the end of the product code.

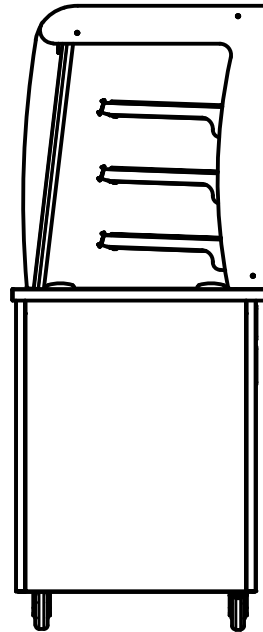

Moffat Specification

Heated Display
Three heated upper shelves with a neutral bottom deck
LED Illumination with ticket strips and rear sliding double glazed doors

Display Capacity
0.20 m3

Dimensions
Width - 1158mm
Depth - 680mm
Height - 1650mm
Weight - 125kg

Power Rating
1.50kw

Capacity of Cupboard [usable inside space]
Width - 1023mm
Depth - 555mm
Usable Height Bottom shelf - 204mm
Usable Height Top Shelf - 245mm


133 off 10" plates stacked
or
6 off 1/1GN pans side by side 150mm deep 3 on top 3 on bottom

Materials
1.2mm 304 Grade St/ Steel Top & Supports
0.7mm 430 Grade St/ Steel Internal Structure
GN 1/1 Grid Shelves with 30mm x 30mm tube supports

Installation
All swivel castors, two braked

ALL SHEET METAL DIMENSIONS ARE I/S (INSIDE SIZES) (UNLESS OTHERWISE STATED)

ALL DIMENSIONS IN (mm), TOLERANCE = LINEAR ± 0.5mm, ANGULAR ± 0.5mm (OR AS STATED). ALL SHARP EDGES TO BE REMOVED FROM SHEET METAL PARTS

Product	VERSICARTE			Product No	N/A			 The Catering Equipment Company	
Description	*** VC3HD ***								
Material/Finish	Thickness		Desp/Date						
Legacy P/N	Weight	125kg	Quote No.		Dwg No.	VCP-164191	Issue		
Client			SO Number	STANDARD	Drawn By	ABB			
Client Project			Approved By		Date	20/05/2025			
E & R MOFFAT LTD, SEABEGS ROAD, BONNYBRIDGE, FK4 2BS, T: +44 (0)1324 812272, E: sales@ermoffat.co.uk, Web: www.ermoffat.co.uk					Scale	1 : 20	Sheet	1 / 2	A4

No reproduction or publication of this drawing may be made, and no article may be manufactured or assembled in accordance with this drawing without prior written consent. This prohibition is a term of any contract relating to this drawing. Rights reserved under the Copyright Act 1956 as amended by the Design Copyright Act 1968.